



CAL-SIERRA PIPE, LLC



CAL-SIERRA PIPE, LLC is a value added distributor of steel pipe, well casing, corrugated metal pipe, corrugated plastic pipe, canal/flap/ditch gates, geo-textile fabrics and other related products for the water well drilling, agricultural, mining, construction, fabrication and sign industries in California and the other Western United States.



Our hallmark has been our commitment to customer service, consistent product quality and timely delivery, which has made **Cal-Sierra** the steel pipe supplier of choice.



Corporate Office

3033 South Highway 99, Stockton, CA 95215-8034

Phone: (209) 466-0988 Fax: (209) 466-4571

800-366-0988

www.calsierrapipe.com



CAL-SIERRA PIPE, LLC

Serving the Western U.S. since 1962

SERVING THE WATER WELL DRILLING, AGRICULTURE,

COMMON WELL CASING SIZES

Dimensions / Collapse Pressure in PSI

WALL THICKNESS		.134	.156	.188	.250	.312	STD.	.500
PIPE SIZE	O.D. SIZE							
6	6.625	338	482	735	1317		1626	
8	8.625		253	401	770		1290	
10	10.75			232	468		1071	
12	12.75			149	310	527	795	1417
14	14.00			116	245	425	647	1184
16	16.00			81	174	307	477	903
18	18.00				128	228	360	702
20	20.00				96	174	278	554
22	22.00				74		218	444
24	24.00				59		174	360
26	26.00				47	86	141	296
30	30.00				31	58	96	206
36	36.00						59	126
42	42.00						38	84
48	48.00						26	59

Collapse Pressures are per AWWA A100 Sec. J.2 * Yield 36,000 PSI, Ellipticity = 1%

The largest combined inventory of Well Casing, Well Screen, and Perforated Pipe in the Western United States.




WELD COLLARS
6" - 30" in stock with site holes.

OTHER PRODUCTS & SERVICES


- * Lug & Collaring
- * Chemicals
Nuwell
- * K-Packers
- * Bull Nose
- * Flush Joint Thread



DRIVE SHOES
6" - 16" in stock.

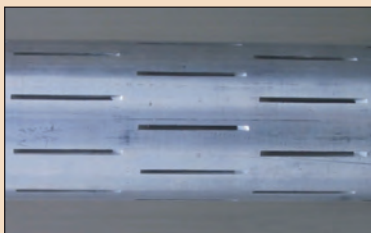

PERFORATED PIPE
2" - 20" in stock
*Special Perforations available.



WELL SCREEN
6" - 18" in stock *Featuring Johnson Agriscreen
Stainless and other specialty products available.



STEEL PIPE & CASING
1/2" - 48" A53A, A53B, A252, A106B, ERW, DSAW, Seamless, OD sizes and Gauge Pipe.



TELEPHONE: 800/366-0988 209/466-0988 FAX: 209/466-4571

CONSTRUCTION, MINING AND FABRICATION INDUSTRIES

FORMULA TO CALCULATE WEIGHT OF PIPE IN POUNDS PER FOOT

(O.D. in inches - wall thickness) x wall thickness x 10.68 = wt/ft
Example: For 16" x 1/4" wall pipe $(16 - .250) \times .250 \times 10.68 = 42.05$

FABRICATED, LINED & COATED STEEL PIPE TO ANY SPECIFICATION



*Pipe, Valves & Fittings for Irrigation, Transmission,
and Drainage Applications.*



CANAL & FLAP GATES
6" - 36" in stock.

OTHER PRODUCTS & SERVICES


- * Grooving up to 24"
- * Engineering Fabrics
- * Pipe Fittings
- * Flanges
- * Stainless Steel Pipe
- * Rolled & Welded Pipe




DRESSER COUPLERS
2" - 36" in stock.



CORRUGATED PLASTIC
6" - 36" Pipe & Fittings in stock.
All other diameters available
on order.



CORRUGATED STEEL
6" - 48" Pipe & Fittings in
stock. All other diameters
available on order.

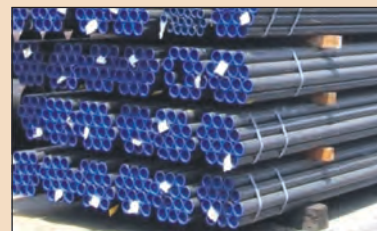

STEEL PIPE & CASING
1/2" - 48" A53A, A53B, A252,
A106B, ERW, DSAW, Seamless,
OD sizes and Gauge Pipe.



TELEPHONE: 800/366-0988 209/466-0988 FAX: 209/466-4571

PIPE SIZE	O.D. SIZE	5	10	20	30	40	STD.	80	XH	120	160	XXH	GAUGE PIPE					
														14GA	12GA	10GA	7GA	3GA
1/8	.405	.035 1383	.049 1863			.068 2447	.068 2447	.095 3145	.095 3145									
1/4	.540	.049 2570	.065 3297			.088 4248	.088 4248	.119 5351	.119 5351									
3/8	.675	.049 3276	.065 4235			.091 5676	.091 5676	.126 7388	.126 7388									
1/2	.840	.065 5383	.083 6710			.109 8510	.109 8510	.147 1088	.147 1088		.187 1304	.294 1714						
3/4	1.050	.065 6838	.083 8572			.113 1131	.113 1131	.154 1474	.154 1474		.218 1937	.308 2441						
1	1.315	.065 8678	.109 1404			.133 1679	.133 1679	.179 2172	.179 2172		.250 2844	.358 3659						
1-1/4	1.660	.065 1107	.109 1806			.140 2273	.140 2273	.191 2997	.191 2997		.250 3765	.382 5214						
1-1/2	1.900	.065 1274	.109 2085			.145 2718	.145 2718	.200 3631	.200 3631		.281 4859	.400 6408						
2	2.375	.065 1604	.109 2638			.154 3653	.154 3653	.218 5022	.218 5022		.343 7444	.436 9029						
2-1/2	2.875	.083 2475	.120 3531			.203 5793	.203 5793	.276 7661	.276 7661		.375 1001	.552 1370						
3	3.50	.083 3029	.120 4332			.216 7576	.216 7576	.300 1025	.300 1025		.437 1432	.600 1858						
3-1/2	4.00	.083 3472	.120 4973			.226 9109	.226 9109	.318 1251	.318 1251			.636 2285						
4-OD	4.00												.079 3.308	.109 4.530	.134 5.532	.188 7.654		
4	4.50	.083 3.915	.120 5.613			.237 10.79	.237 10.79	.337 14.98	.337 14.98	.437 19.01	.531 22.51	.674 27.54	.079 3.730	.109 5.112	.134 6.248	.188 8.658		
4-1/2	5.00					.247 12.53		.355 17.61				.710 32.53						
5-OD	5.00												.079 4.152	.109 5.694	.134 6.964	.188 9.662		
5	5.563	.109 6.349	.134 7.770			.258 14.62	.258 14.62	.375 20.78	.375 20.78	.500 27.04	.625 32.96	.750 38.55						
6-OD	6.00												.079 4.996	.109 6.858	.134 8.395	.188 11.67		
6	6.625	.109 7.585	.134 9.289			.280 18.97	.280 18.97	.432 28.57	.432 28.57	.562 36.39	.718 45.30	.864 53.16		.109 7.585	.134 9.289	.188 12.92	.250 17.02	
7-OD	7.00													.109 7.840	.134 9.826	.188 13.67		
8-OD	8.00												.079 6.684	.109 9.186	.134 11.25	.188 15.68		
8	8.625	.109 9.914	.148 13.40	.250 22.36	.277 24.70	.322 28.55	.322 28.55	.500 43.39	.500 43.39	.718 60.63	.906 74.69	.875 72.42		.109 9.914	.134 12.15	.188 16.94	.250 22.36	
10-OD	10.00													.109 11.57	.134 14.12	.188 19.70	.250 26.03	
10	10.75	.134 15.19	.165 18.70	.250 28.04	.307 34.24	.365 40.48	.365 40.48	.593 64.33	.500 54.74	.843 89.20	1.125 115.7			.109 12.28	.134 15.19	.188 21.20	.250 28.04	
12-OD	12.00													.109 13.84	.134 16.98	.188 23.71	.250 31.37	
12	12.75	.165 22.18	.180 24.20	.250 33.38	.330 43.77	.406 53.53	.375 49.56	.687 88.51	.500 65.42	1.000 125.5	1.312 160.3			.109 14.71	.134 18.05	.188 25.22	.250 33.38	
14	14.00		.250 36.71	.312 45.68	.375 54.57	.437 63.37	.375 54.57	.750 106.1	.500 72.09	1.093 150.7	1.406 189.1			.109 16.17	.134 19.84	.188 27.73	.250 36.71	
16	16.00		.250 42.05	.312 52.36	.375 62.58	.500 82.77	.375 62.58	.843 136.5	.500 82.77	1.218 192.3	1.593 245.1			.109 18.49	.134 22.70	.188 31.78	.250 42.05	
18	18.00		.250 47.39	.312 59.03	.437 82.06	.562 104.8	.375 70.59	.937 170.8	.500 93.45	1.375 244.1	1.781 308.5			.109 20.82	.134 25.56	.188 35.76	.250 47.39	
20	20.00		.250 52.73	.375 78.60	.500 104.1	.593 122.9	.375 78.60	1.031 208.9	.500 104.1	1.500 296.4	1.968 379.0				.134 28.43	.188 39.78	.250 52.73	
22	22.00		.250 58.07	.375 86.61	.500 114.8	.500 114.8	.375 86.61	1.125 250.8	.500 114.8	1.625 353.6	2.125 451.1				.134 31.29	.188 43.79	.250 58.07	
24	24.00		.250 63.41	.375 94.62	.562 140.8	.687 171.2	.375 94.62	1.218 296.4	.500 125.5	1.812 429.4	2.343 541.9				.134 34.15	.188 47.81	.250 63.41	
26	26.00		.312 85.60	.500 136.2			.375 102.6		.500 136.2						.134 37.01	.188 51.82	.250 68.75	
30	30.00		.312 98.93	.500 157.5	.625 196.1		.375 118.6		.500 157.5						.134 42.74	.188 59.85	.250 79.43	
36	36.00		.312 118.9	.500 189.6	.625 236.1	.750 282.3	.375 142.7		.500 189.6							.188 71.90	.250 95.45	
42	42.00						.375 166.7		.500 221.6							.188 83.95	.250 111.5	
48	48.00						.375 190.7		.500 253.6							.188 96.00	.250 127.5	

NOTE: GREEN indicates wall thickness in inches - BLACK indicates weight per foot in pounds.

SAW CUTTING

WELDING

TORCH CUTTING

ROLL GROOVING
